


F-5A *New* 5.5" Fully-Featured Field Monitor with FHD IPS-LCD



Main Body Dimensions

Main Body 162.5 x 92 x 27.6 (mm) / 6.39 x 3.6 x 1.11 (inch)
Weight 0.42kg / 0.92 lbs

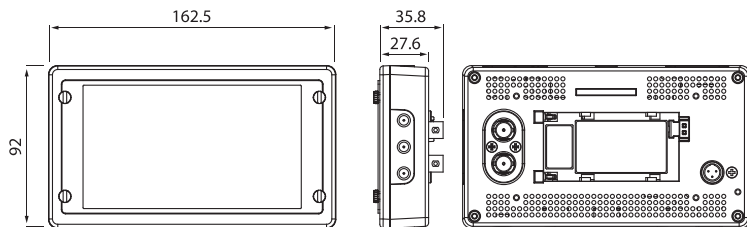

Optional Accessories



Product Highlights

- 5.5" Full HD Resolution (1920x1080)
- Anti Glare (F-5A_AG)
- Excellent Sharpness
- Peaking Boost
- Camera LUTs support
- HDMI ↔ SDI cross conversion
- Built-in battery bracket (Sony L-series)
- Luma(Y') Zone Check
- Zoom
- Waveform / Vectorscope
- H/V Flip
- Auto Flip
- HDR emulation
- Split Zoom
- Arri Metadata
- Focus Assist
- Custom 3D LUT import
- Anamorphic Desqueeze
- Grid
- Fast mode

Size	5.5"
Resolution	1920 x 1080 (16 : 9)
Pixel Pitch	0.0213(W)×0.0639(H)mm
Color Depth	16.7M
Viewing Angle (Typ.)	160°(H) / 160°(V)
Luminance (Max.)	500cd/m ²
Contrast Ratio	1000:1
Display Area	122.7(H)×69.0(V) mm
Input	
1 x BNC	SDI Input
1 x HDMI	HDMI(1.3) Input
Output	
1x BNC	SDI Output, HDMI to SDI conversion
1x HDMI	HDMI Output, SDI to HDMI conversion
Input Signal	
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
HDMI	1080p(60/59.94/50/30/25/24/23.98)/1080i(60/59.94/50)/720p(60/50)/
SDI Input Signal Formats	
SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i (60/59.94/50) 1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
Audio In	Embedded Audio
Audio Out	Analog Stereo (Phone Jack)
Power	DC 12V 12V 0.65A / 34V 0.27A
Power Consumption (Approx.)	10Watts
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Basic Accessory	D-Tap Cable Camera Mount L-Type BNC Connector