


# F-7H mk2 *New* The Brightest 7" Field Monitor with Preset Touch Key




## Main body Dimensions

**Main Body** 211 x 125 x 28.3 (mm) / 8.3 x 4.95 x 1.11 (inch)

**Weight** 0.8kg / 1.76 lbs

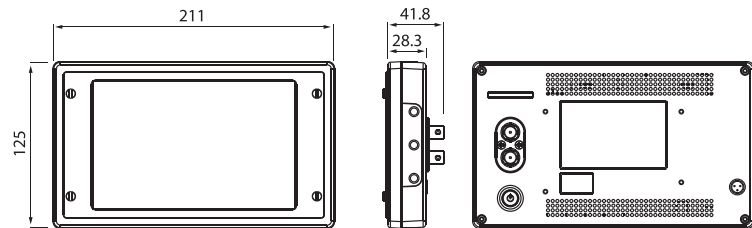

## Optional Accessories

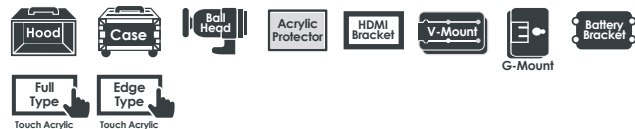

## Product Highlights

- 7" Full HD Resolution (1920 x 1080)
- Luminance up to 3,600cd/m<sup>2</sup>
- Preset Touch Key pad
- Excellent Sharpness
- Peaking Boost
- Anti Glare (F-7H mk2\_AG)
- Waveform/ Vectorscope
- H/V Flip
- Auto Flip
- HDR Emulation (PQ, HLG, S Log 3)
- Split Zoom
- Arri Metadata
- Focus Assist
- Custom 3D LUT Import
- Anamorphic Desqueeze
- Camera LUTs support
- HDMI ↔ SDI cross conversion
- Luma(Y') Zone Check
- Zoom

<b>Size</b>	7"
<b>Resolution</b>	1920 x 1080 (16 : 9)
<b>Pixel Pitch</b>	0.078(H)×0.078(V)mm
<b>Color Depth</b>	16.7M
<b>Viewing Angle (Typ.)</b>	160°(H) / 160°(V)
<b>Luminance (Max.)</b>	3600cd/m <sup>2</sup>
<b>Contrast Ratio</b>	1200:1
<b>Display Area</b>	151.2(H)×94.5(V)mm
<b>Input</b>	
1 x BNC	SDI Input
1 x HDMI	HDMI Input
<b>Output</b>	
1x BNC	SDI Output, HDMI to SDI conversion
1x HDMI	HDMI Output, SDI to HDMI conversion
<b>Input Signal</b>	
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
HDMI	1080p(60/59.94/50/30/25/24/23.98) / 1080i(60/59.94/50) / 720p(60/50) / 480i(60)/480p(60) / 576i(50)/576p(50)
<b>SDI Input Signal Formats</b>	
SMPTE-425M-A/B	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i (60/59.94/50) 1080p (30/29.97/25/24/24sF/23.98/23.8sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048×1080p(24/24sF/23.98/23.98sF)
<b>Audio In</b>	Embedded Audio
<b>Audio Out</b>	Analog Stereo (Phone Jack)
<b>Power</b>	DC 12V 1.8A / 34V 0.6A
<b>Power Consumption (Approx.)</b>	22 Watts (Max.)
<b>Operating Temperature</b>	0°C to 45°C (32°F to 113°F)
<b>Storage Temperature</b>	-20°C to 60°C (-4°F to 140°F)
<b>Basic Accessory</b>	D-Tap Cable Camera Mount L-Type BNC Connector